



## MONO PERC 60PCS SERIES MODULE

- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 quality management system standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers



OHSAS 18001



ISO 9001



ISO 14001




## WARRANTIES

12 years for product defects in materials & workmanship

12 years for 90% of warranted minimum power output

25 years for 80% of warranted minimum power output

25 years linear warranty

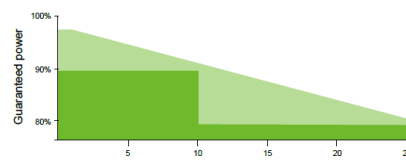


## QUALITY DESIGN

## GREAT DURABILITY


## EASY INSTALLATION

### 310W I-V Curve

Current-Voltage & Power-Voltage Curves (310W)

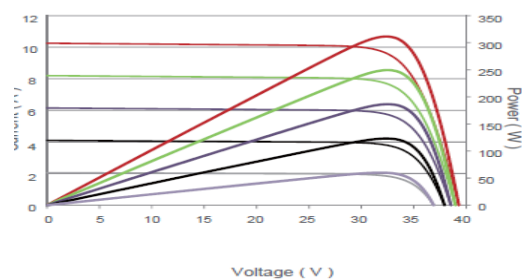

Temperature Dependence of  $I_{sc}$ ,  $V_{oc}$ ,  $P_{max}$

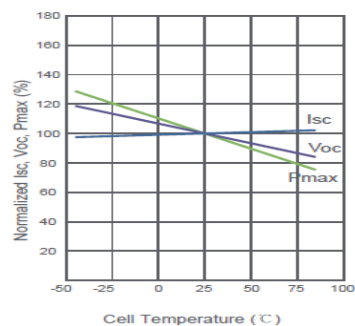

## SR-325/320/315/310/305-60M

### PRODUCT SPECIFICATION

Electrical parameters at standard test conditions  
(STC:AM=1.5, 1000W/m2, Cells Temperature 25℃ )

Typical type	320W	315W	310W	305W
Max power(Pmax)	320	315	310	305
Max power voltage(Vmp)	33.40	33.20	33.00	32.80
Max power current(Imp)	9.59	9.49	9.40	9.30
Open circuit voltage(Voc)	40.90	40.70	40.50	40.30
Short circuit current(Isc)	10.15	10.04	9.92	9.83
FF(%)	77.08	77.09	77.16	76.99
Module Efficiency(%)	19.22	18.92	18.62	18.32
Max system voltage	DC 1000V(TUV)			
Maximum Series Fuse Rating	20A			

#### Mechanical Data

Dimensions	1665×1000×35mm
Weight	19kgs
Front glass	3.2 mm tempered glass
Output cables	4 mm2 lengths 900 mm
Connectors	MC4 compatible IP67
Cell type	Mono Cell 158.75*158.75mm
Number of cells	60 cells in series

#### Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.048% / °C
Temp.Coeff.of Voc(TK Voc)	(-0.28%) / °C
Temp.Coeff.of Pmax(TK Pmax)	(-0.37%) / °C
Operating temperature	(-40~+85%) °C
Normal operating cell temperature	45±2 °C

#### Packing Configuration

Container	20'GP	40'GP	40'HQ
Pieces per pallet	60	60	64
Pallets per container	6	14	14
Pieces per container	360	840	896

#### Tests, Certifications

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001
Certifications	CQC,TUV,CE,MCS,CEC,CHUBB
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) Snow loads(5400 Pascal)
Positive tolerance	±3%
Junction box	IP67

#### Dimensions and Structure

